



# RF-310

Posibles aplicaciones:


Peso:



## Características

| MODEL          | VOLTAGE         |               | NO LOAD |         | AT MAXIMUM EFFICIENCY |         |        |      | STALL  |        |      |         |
|----------------|-----------------|---------------|---------|---------|-----------------------|---------|--------|------|--------|--------|------|---------|
|                | OPERATING RANGE | NOMINAL       | SPEED   | CURRENT | SPEED                 | CURRENT | TORQUE |      | OUTPUT | TORQUE |      | CURRENT |
|                |                 |               | r/min   | A       | r/min                 | A       | mN-m   | g-cm | W      | mN-m   | g-cm | A       |
| RF-310TA-11400 | 1-6             | 2.5V CONSTANT | 2800    | 0.017   | 2190                  | 0.061   | 0.32   | 3.3  | 0.073  | 1.47   | 15   | 0.22    |

## Dimensiones

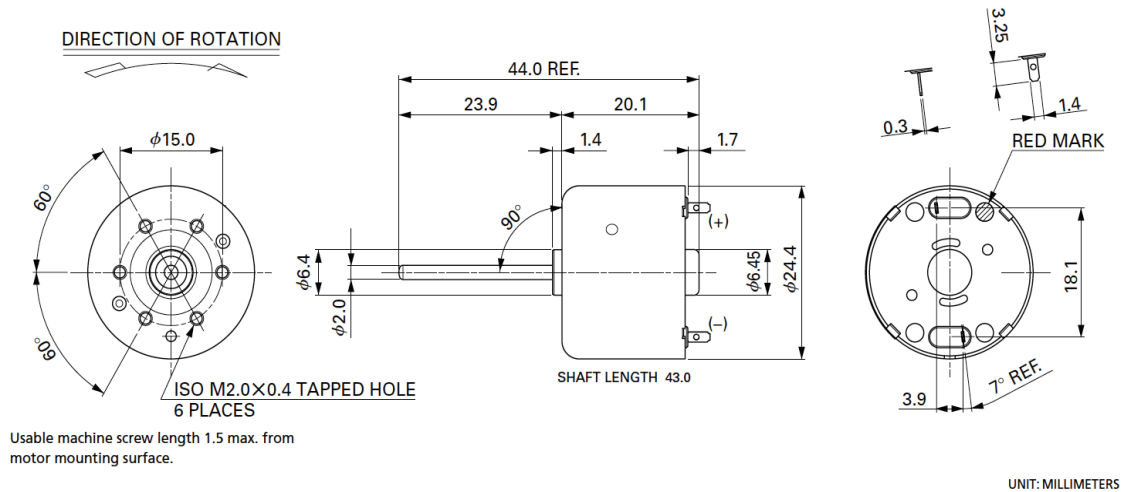

## Curva de funcionamiento

