
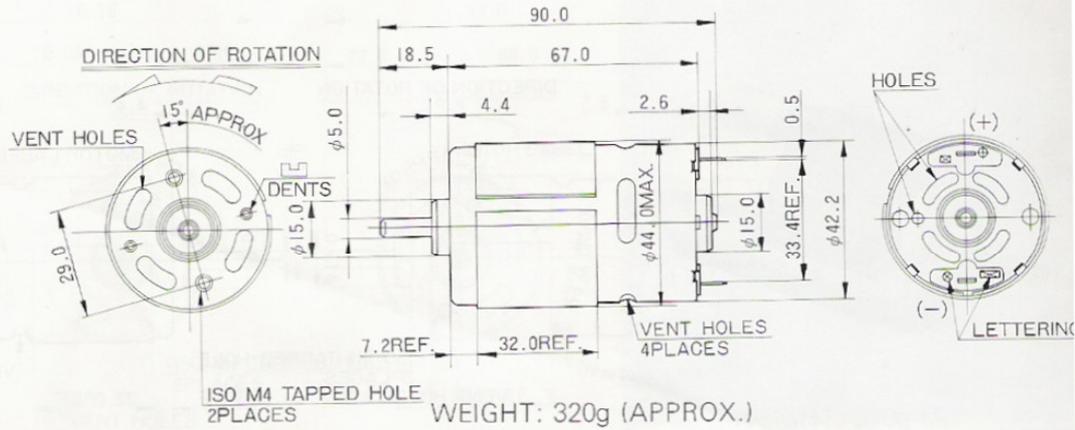



**MABUCHI  
MOTOR**

# RS-775SH/SF

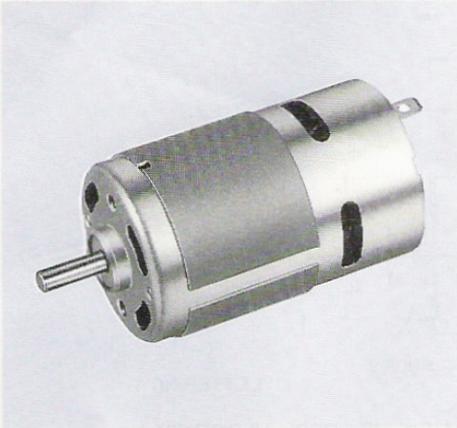


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL TORQUE	
	OPERATING RANGE	NOMINAL	SPEED rpm	CURRENT A	SPEED rpm	CURRENT A	TORQUE		OUTPUT W	EFF %	oz-in	g·cm
RS-775SH-4047	12.0~30.0	24.0V CONSTANT	10300	0.4	9010	2.79	7.85	565.0	52.2	78.0	62.5	4500
RS-775SH-6021	6.0~20.0	12.0V CONSTANT	11550	1.0	10000	6.40	7.74	557.6	57.2	74.0	57.6	4150
RS-775SH-7513	4.5~15.0	6.0V CONSTANT	9300	1.5	8020	9.37	7.00	503.8	41.4	73.7	50.7	3650
RS-775SH-7513	4.5~15.0	12.0V CONSTANT	18800	2.0	16160	12.3	9.36	673.8	111.7	76.0	66.7	4800


**RS-775SH-4047**

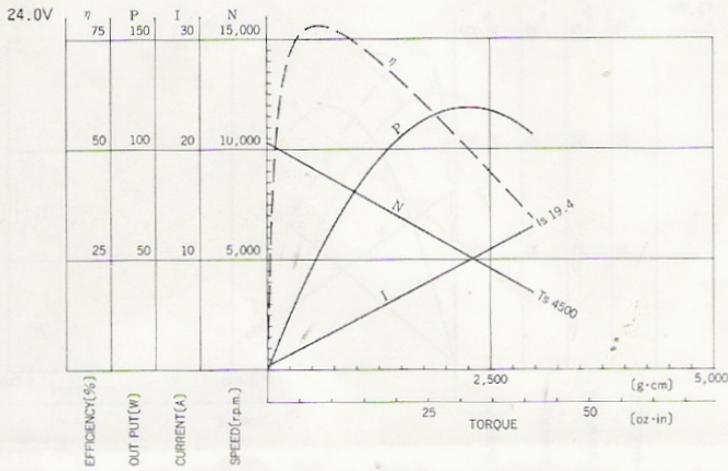

**RS-775SH-6021**

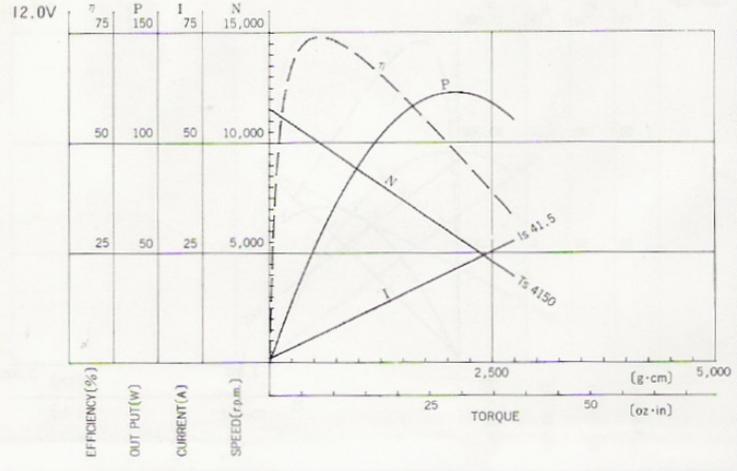

**RS-775SH-7513**

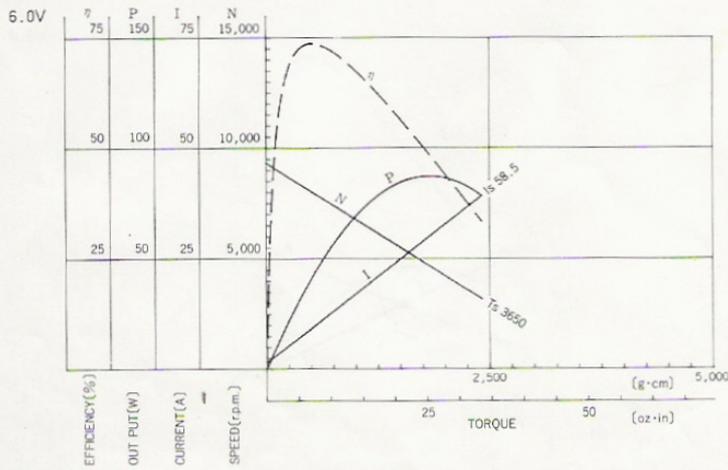

**RS-775SH-7513**

